

1-Line, Bi-directional, Transient Voltage Suppressors

Descriptions


The ESD5B350TA is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD5B350TA may be used to provide ESD protection up to $\pm 25\text{kV}$ air discharge $\pm 25\text{kV}$ contact discharge according to IEC61000-4-2, and withstand peak pulse current up to 20 A (8/20 μs) according to IEC61000-4-5.

The ESD5B350TA is available in SOD-523 package. Standard products are Pb-free and Halogen-free.



SOD-523

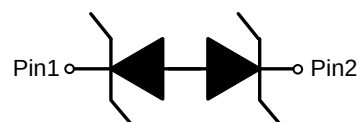

Circuit diagram

Features

- Stand-off voltage: $\pm 5\text{V}$ Max
- Transient protection for each line according to IEC61000-4-2 (ESD): $\pm 25\text{kV}$ air discharge $\pm 25\text{kV}$ contact discharge IEC61000-4-5 (surge): 20 A (8/20 μs)
- Solid-state silicon technology
- Low clamping voltage: $V(\text{CL})\text{R}$

Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- MID/CAR DVD/MP3/MP4/PMP Players

Order information

Device	Marking	Package	Shipping
ESD5B350TA	L	SOD-523	3000/Tape&Reel

Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	20	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 25	kV
ESD according to IEC61000-4-2 contact discharge		± 25	
Operating temperature	T_{OP}	-40~85	$^{\circ}C$
Operation junction temperature	T_J	125	$^{\circ}C$
Lead temperature	T_L	260	$^{\circ}C$
Storage temperature	T_{STG}	-55~150	$^{\circ}C$

Electrical characteristics (TA=25 $^{\circ}C$,unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				± 5	V
Reverse leakage current	I_R	$V_{RWM} = 5\text{ V}$			1	μA
Reveres breakdown voltage	V_{BR}	$I_T = 1\text{mA}$	6	7	8	V
Clamping voltage	V_C	$I_{pp} = 1\text{ A}$ $t_p = 8/20\mu s$			9	V
		$I_{pp} = 20\text{ A}$ $t_p = 8/20\mu s$		20	22	V
Junction capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$		35	45	pF


Electrical performance curve

V_C : Maximum clamping voltage


V_{br} : Reverse breakdown voltage

V_{RWM} : Working voltage


I_{PP} : Maximum peak current

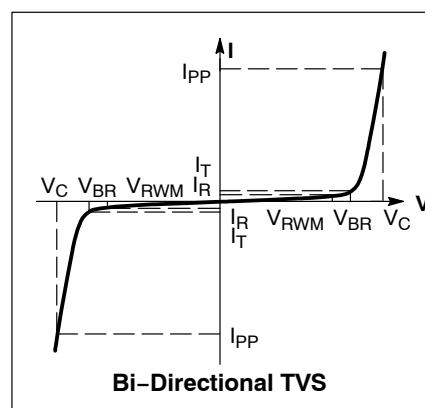


Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

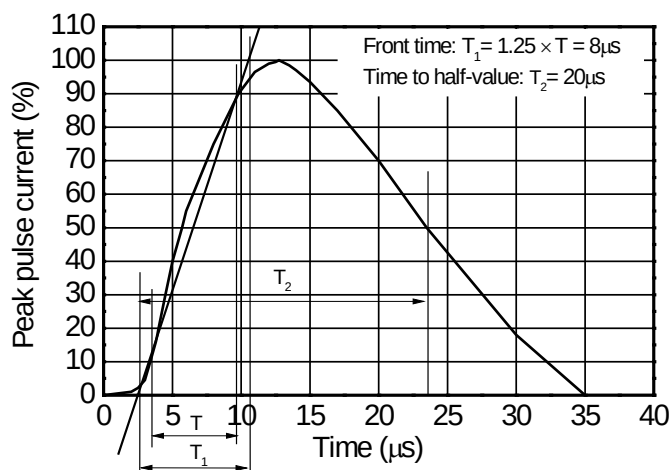

8/20 μs waveform per IEC61000-4-5

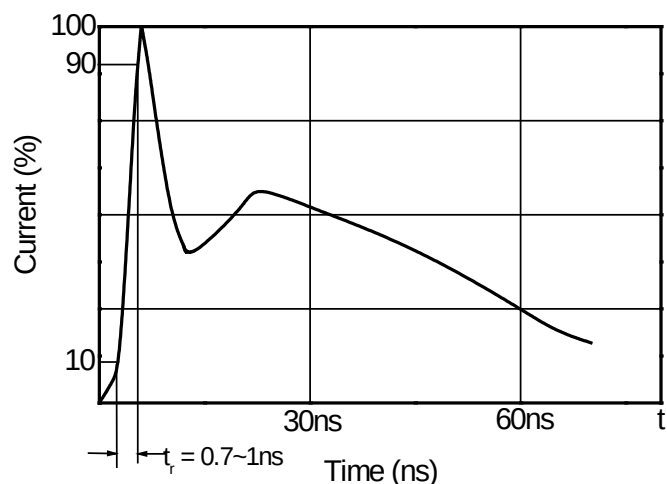


Contact discharge current waveform per IEC61000-4-2

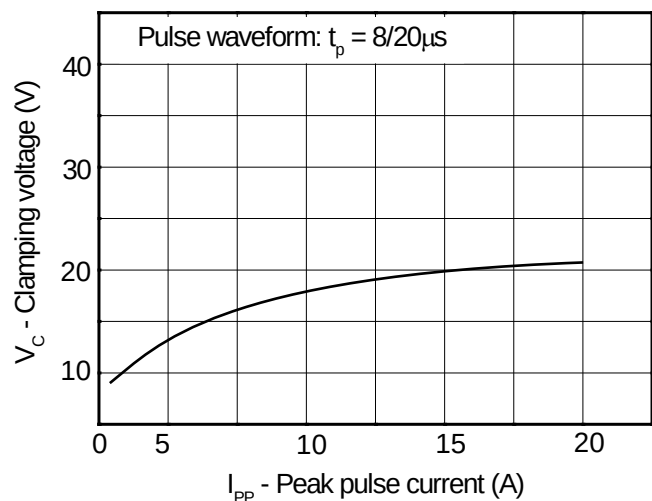


Clamping voltage vs. Peak pulse current

TIME (μs)

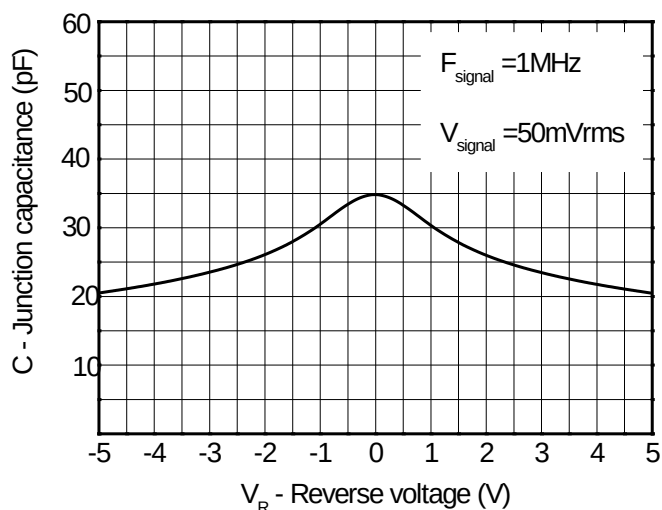


Capacitance vs. Reverses voltage

AMBIENT TEMPERATURE T_a ($^\circ\text{C}$)


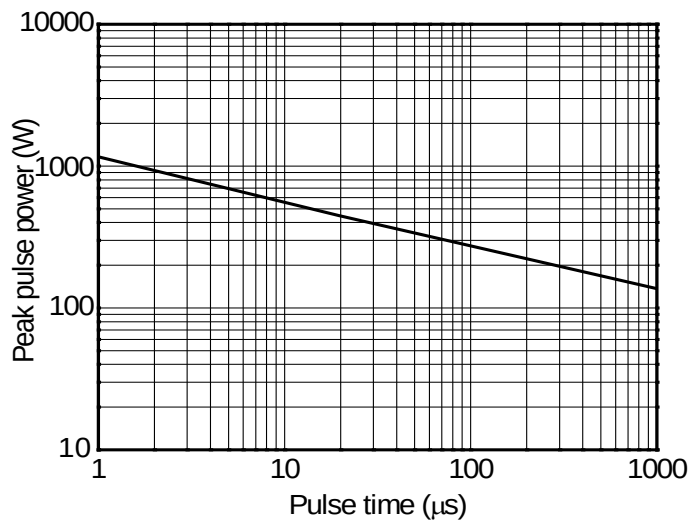


Non-repetitive peak pulse power vs. Pulse time

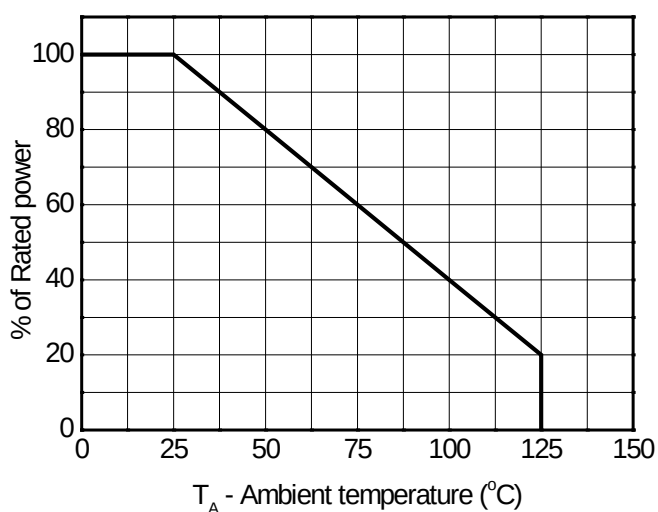


Power derating vs. Ambient temperature


ESD clamping test setup and waveforms

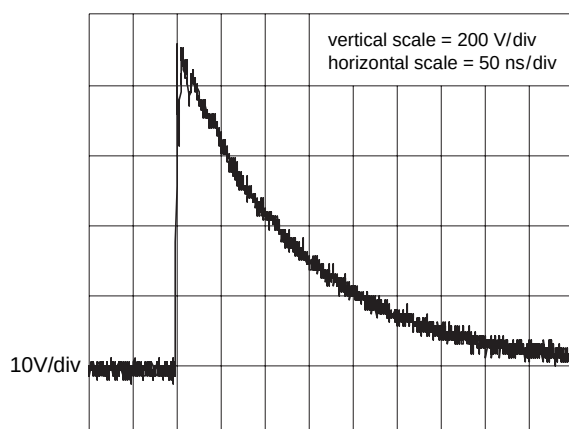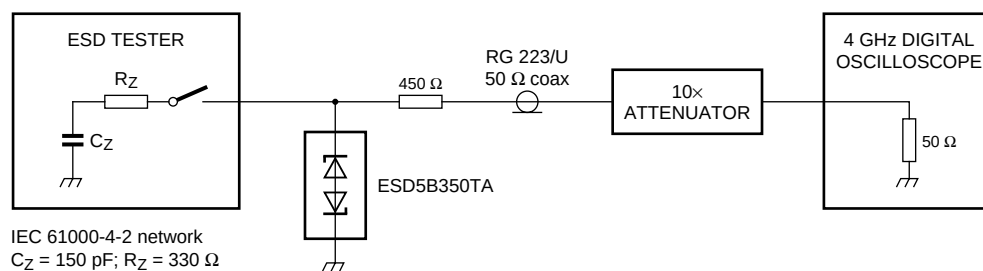


unclamped +1 kV ESD voltage waveform
 (IEC61000-4-2 network)

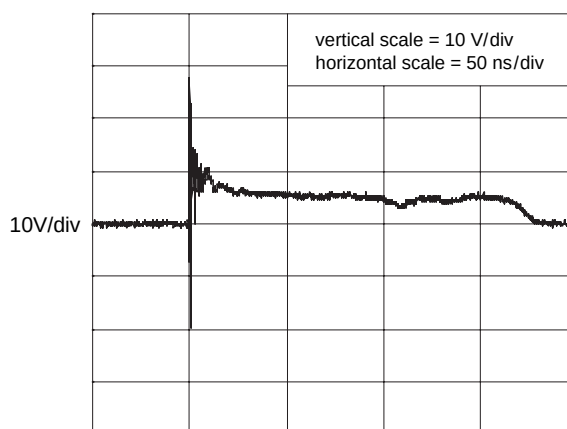

clamped +1 kV ESD voltage waveform
 (IEC61000-4-2 network)

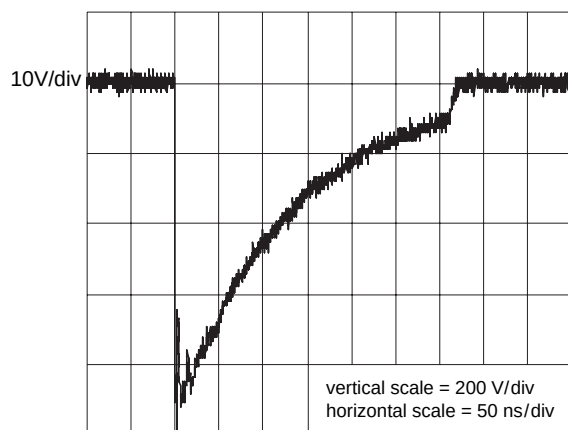


unclamped -1 kV ESD voltage waveform
 (IEC61000-4-2 network)

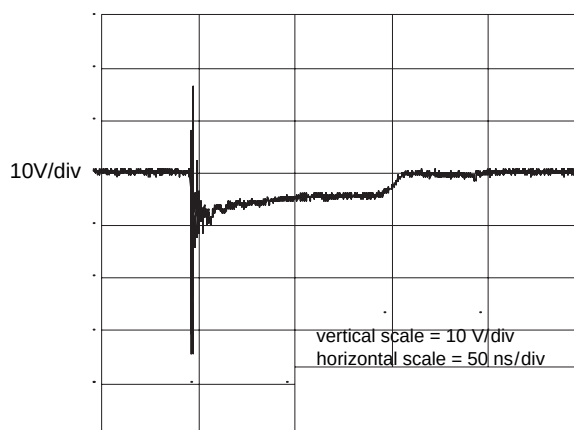

clamped -1 kV ESD voltage waveform
 (IEC61000-4-2 network)


Package outline dimensions

SOD-523

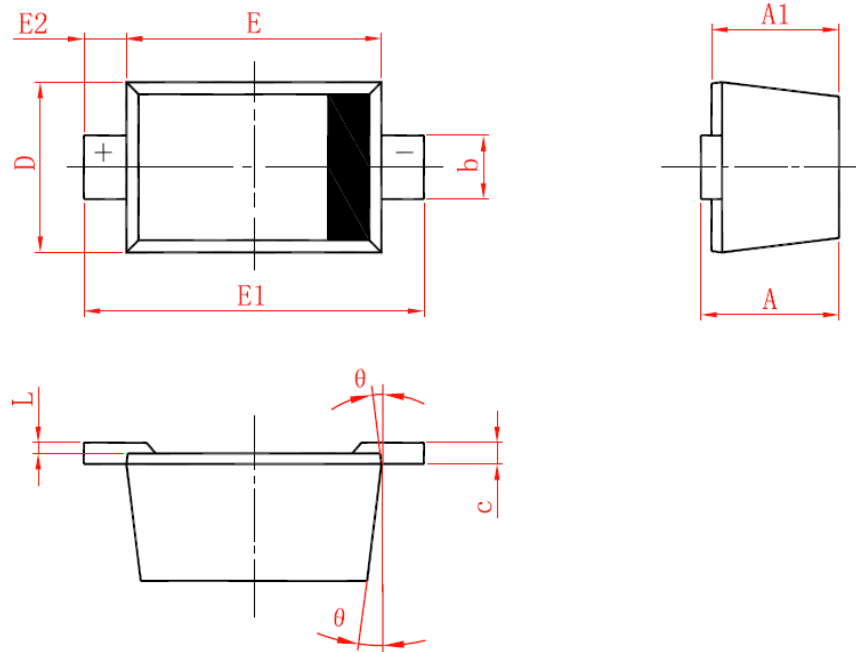

Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	0.510	0.640	0.770
A1	0.500	0.600	0.700
b	0.250	0.300	0.350
c	0.080	0.115	0.150
D	0.750	0.800	0.850
E	1.100	1.200	1.300
E1	1.500	1.600	1.700
E2	0.200 Ref		
L	0.010	0.040	0.070
θ	7° Ref		

Recommend land pattern (Unit: mm)

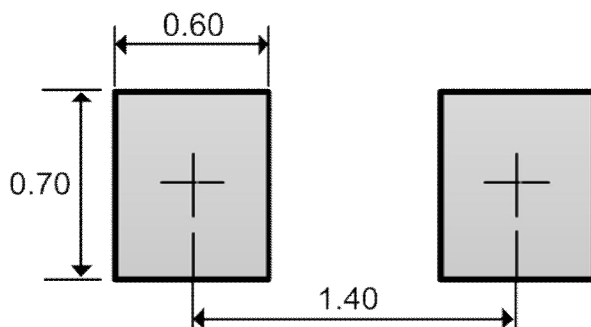

Note: This land pattern is for your reference only. Actual pad layouts may vary depending on application.